








BD325 BALCONY DOOR

AW50 Rating


Features & Options:

- 3-1/4" Frame Profile
- 1/8" Wall Thickness
- Insul-bar Thermal Break
- 1" Insulated Clear Tempered Glass
- European Locket
- Multi-Point Lock System
- Double Door Available
- Transom and Sidelite
- In-Swing and Out-Swing

-  Clear Anodized
-  Dark Bronze Anodized
-  White Painted
-  Bronze Painted
-  Custom Finishes Available



Single Door

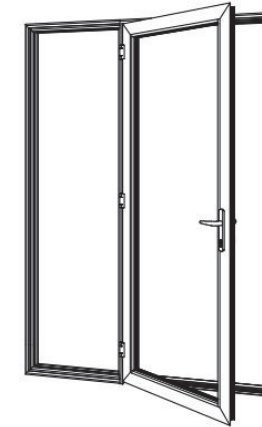

Pair Door



Single Door with Transom



PERFORMANCE

TYPE	DESCRIPTION	BD325
Size	Width X Height	48" X 96"
AAMA 920	Operating/Cycling Performance	30 lbf
AAMA 1304	Forced Entry Resistance	300 lbf
ASTM E 283	Static Pressure Air Infiltration @ 6.20 psf	<0.10 cfm/ft ²
ASTM E 547	Cyclic Pressure Water Resistance	10.03 psf
ASTM E 330	Static Pressure Water Resistance	10.03 psf
ASTM E 330	Uniform Structural Design Load ± Pressure	50 psf
	Uniform Structural Over Load ± Pressure	75 psf
AAMA 507-15	Thermal Simulation (Glass U-Factor 0.30)	0.46
AAMA 1503-09	Physical Thermal Performance	0.43
ASTM E90	Acoustical Performance	STC: 38 OITC: 33